

# DELTEC<sup>®</sup>

## BATTERIES

**DEL-305G**



### Applications

- Aerial Work Platforms
- Floor Cleaning Machines
- Lighting Boards
- Material Handling
- Solar

### Certificates






DELTEC BATTERY  
COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV  
= ISO 9001:2015 =

### Specification


|                       |  |
|-----------------------|--|
| Nominal Voltage       | 6 V  |
| Nominal Capacity      | 300 ah   |
| Battery Type          | Deep-Cycle Flooded / Wet Lead-Acid Battery   |
| Terminal              | Embedded low profile terminal  |
| Approx Weight         | Approx 37.2kg (82 lbs)   |
| Container Material    | Polypropylene  |
| Rated Capacity        | <b>331 Ah</b><br>100 Hour Rate<br><b>300 Ah</b><br>20 Hour Rate<br><b>273 Ah</b><br>10 Hour Rate<br><b>244 Ah</b><br>5 Hour Rate         |
| Reserve Capacity      | <b>Reserve @ 75 AMPS</b><br>155 Minutes  |
| Operating Temperature | <b>Discharge</b><br>-20 ~ 45°C<br><b>Charge</b><br>-20 ~ 45°C (-4 ~ 122°F)<br><b>Storage</b><br>Recommended as close to 25°C as possible |
| Charge Method (25°C)  | <b>Bulk Charge</b><br>7.41V<br><b>Float Charge</b><br>6.75V<br><b>Equalization Charge</b><br>8.10<br><b>Max Charge Current</b><br>0.5C   |
| Self Discharge        | 5 - 15% per month depending on storage temperature conditions  |

Dimension: 314 (L) x 174 (W) x 366 (H) Unit: mm


Terminal

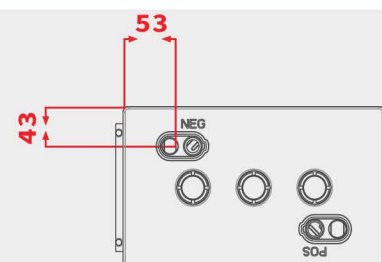

### Performance

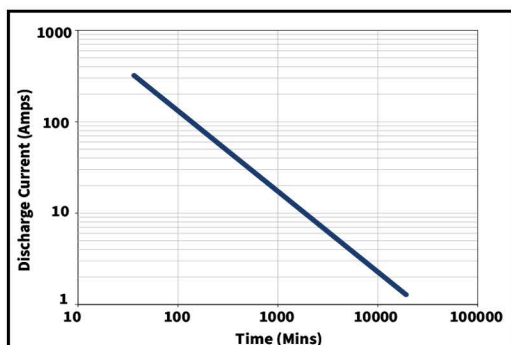

Percent  
Capacity  
  
VS  
  
Temperature

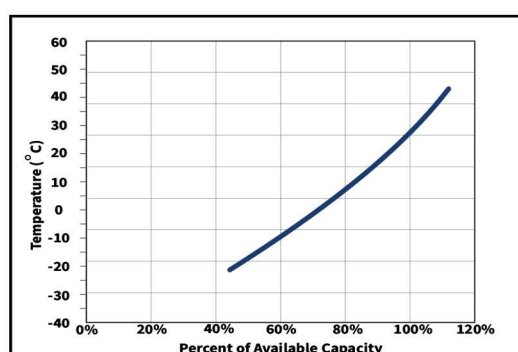

For warranty terms & conditions, visit [www.deltecbatteries.com.au](http://www.deltecbatteries.com.au)

**PERFORMANCE WHEN IT COUNTS**



1300 335 228