



# FUSION BATTERY

LITHIUM EV

## V-LFP-24-160EV

LITHIUM IRON PHOSPHATE BATTERY

Bluetooth

### PERFORMANCE

- Long Cycle Life >2000 cycles @ 100% DOD.
- High Density, High Discharge Current, High Temperature Range.
- Light Weight, Maintenance Free.
- Fast Charging.
- Environment Friendly.

### FEATURES

- Lithium Iron Phosphate (**LiFePO<sub>4</sub>**).
- Integrated Battery Management System (BMS).
- BMS with Intelligent Cell Balancing.
- Sealed ABS Plastic Housing.
- Bluetooth

### BATTERY DATA SHEET

#### Electrical Parameters

Nominal Voltage	25.6V
Rated Capacity	160Ah
Energy	4096Wh
Resistance	≤30mΩ
Efficiency	99%
Cycle Life	>2000 cycles @ 1C, 100% DOD
Self Discharge	2% per Month
Max. Battery connected in Series	4PCS
Max. Battery connected in Parallel	20PCS

#### Discharge Parameters

Continuous Discharge Current	150A
Peak Discharge Current	450A (5 seconds)
Recommended Volt. Disconnect	20V
BMS Discharge Cut-off Voltage	16V
Reconnect Voltage	18.4V
Short Circuit Protection	200~600 us

#### Compliance Certificate

Certifications	UL1642 (CELL)
	CE
	IEC62133 & CB
	KC
	BIS
Shipping Classification	UN3480, Class 9, UN38.3

#### Mechanical Parameters

Dimension (L x W x H)	522 x 240 x 218mm
	20.55 x 9.45 x 8.58"
Weight	37.7kg (83.11bs)
Terminal Type	M8 ( <b>Torque: 10-12N.m</b> )
Battery Housing	ABS, UL-94 V-0
Housing Protection	IP65
Cell Type-Chemistry	LiFePO <sub>4</sub> Cell
SOC Display (Optional)	None

#### Charge Parameters

Charge Method	CC-CV
Charge Voltage	28.8~29.6V
Recommended Float Voltage	27.6V
Recommended Charge Current	30A ~ 80A
Maximum Charge Current	150A
Minimum Charge Current	15A
BMS Charge Cut-off Voltage	31.2V

#### Temperature Parameters

Discharge Temperature	-20 to 60°C (-4 to 140°F)
Charge Temperature	0 to 45°C (32 to 113°F)
Storage Temperature	-20 to 60°C (-4 to 140°F)
BMS Low Temperature Cut-off	-10°C (14°F)
BMS Low Temperature Turn-On	0°C (32°F)
BMS High Temperature Cut-off	65°C (149°F)
BMS High Temperature Turn-On	45°C (113°F)


#### HEAD OFFICE

Unit 30 76 Hume Highway LANSVALE NSW 2166


Tel: +(02) 9755 7851 Fax: +(02) 9755 7852

Email: batteries@superstart.com.au


CYCLE LIFE vs. DEPTH OF DISCHARGE(DOD)  
DISCHARGE @1C, 25°C

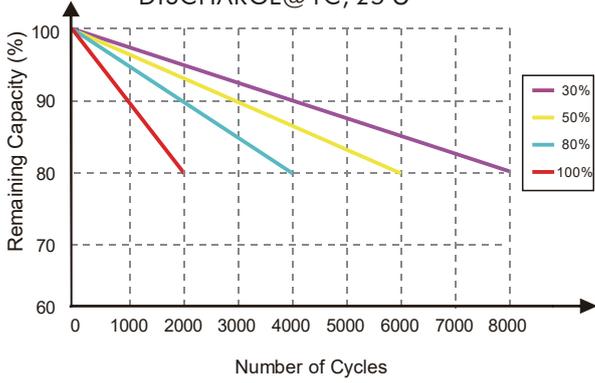


DISCHARGE CAPACITY at VARIOUS TEMPERATURES  
DISCHARGE @1C, 25°C

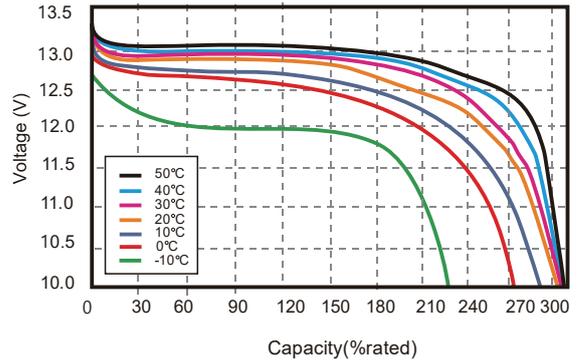


STATE OF CHARGE CURVE @0.5C, 25°C

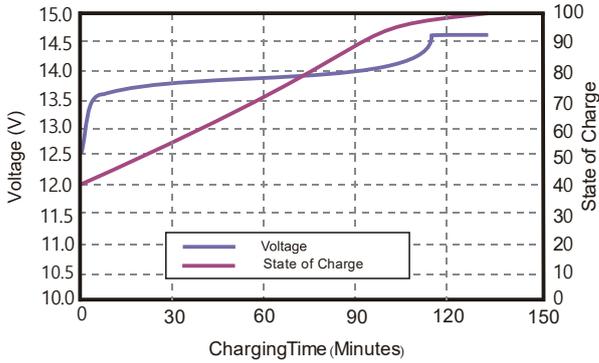

CHARGING CHARACTERISTICS @0.5C, 25°C

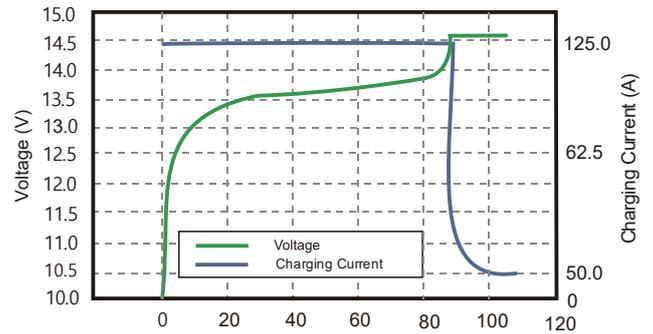

Battery Dimension

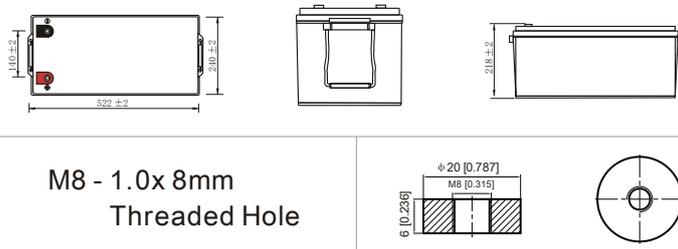

Battery Applications

- + Electric Motors
- + Electric Trolling Motors
- + RV (Camping / Automotive)
- + Data Center UPS
- + Telecom Backup Power
- + Military Power Supply
- + Solar Energy Storage System
- + Solar Street LED Lightings
- + Industrial Robotics & Handling Equipment
- + Floor Cleaning Machines
- + Electric Bike & Motorcycles
- + Electric Mobilities( E-scooters / Wheelchair)
- + Golf Trolley & Golf Carts
- + Medical Devices
- + Electric Boats

**FUSION LITHIUM BATTERY** Bluetooth

**Monitoring System**

VOLTAGE CAPACITY BATTERY HEALTH CHARGE STATUS

View live data with the intelligent Fusion Lithium Bluetooth 4.0 BLE technology.

Find the identification code on top of Fusion Lithium battery. Open the Fusion Lithium App and click relevant code to connect.



- Access your BMS independently with multiple batteries
- Monitor the status of your lithium battery: State Of Charge (SOC), Temperature, charging or discharging current, etc
- Track the Cycle Life of your Lithium Battery
- Assess what protections have been triggered



Do Not Mix With Sealed Lead Acid Batteries When Recycling. See FUSION User's Manual for Proper Operation. Fusion Lithium BATTERIES. All Rights Reserved.



TRADING SINCE 1995

